



BODY: BRASS
PLATING: SEE TABLE

CONTACT: BERYLLIUM COPPER
PLATING: GOLD 30u"



INSULATOR: TEFLON

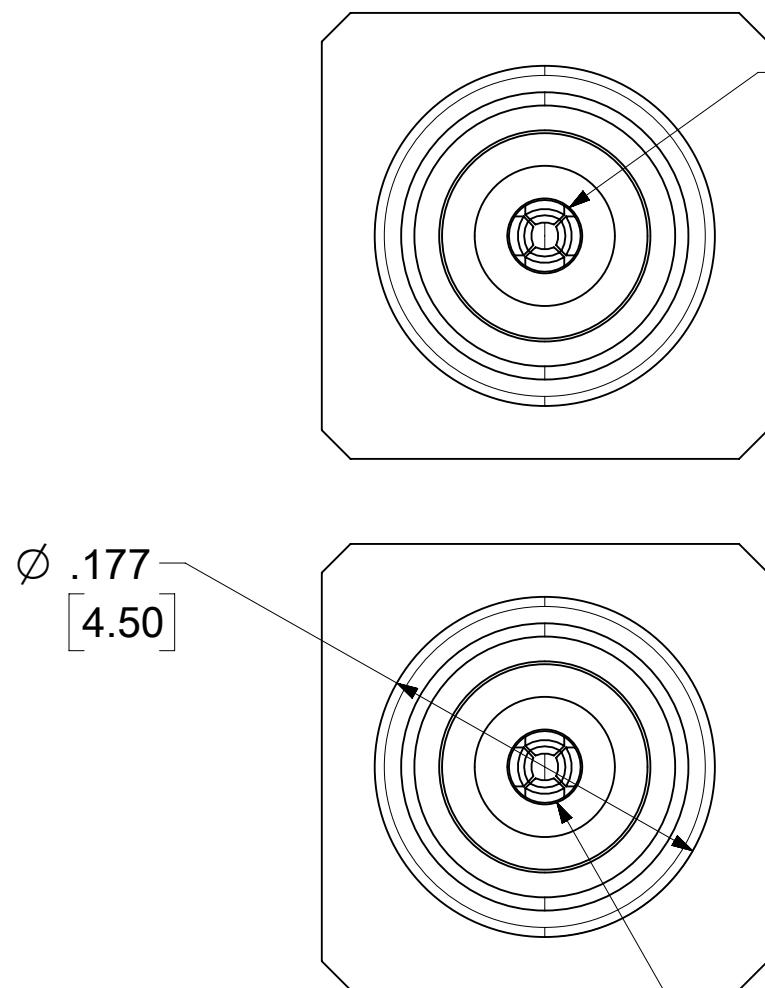

73415-1696
4 SLOT CONTACT

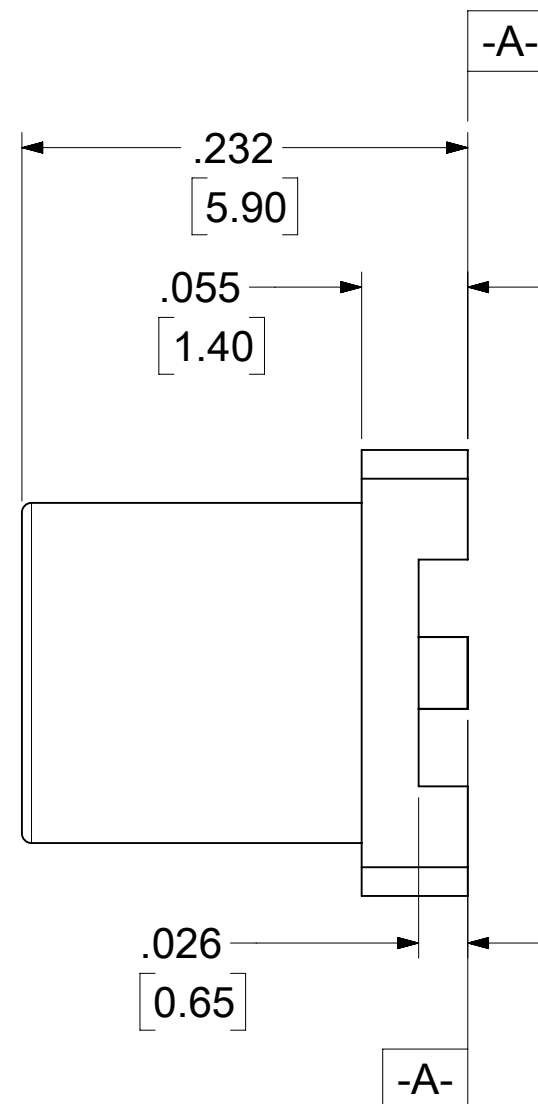


CONTACT TO BE FLUSH
-TO .004(0.10) BELOW
SURFACE

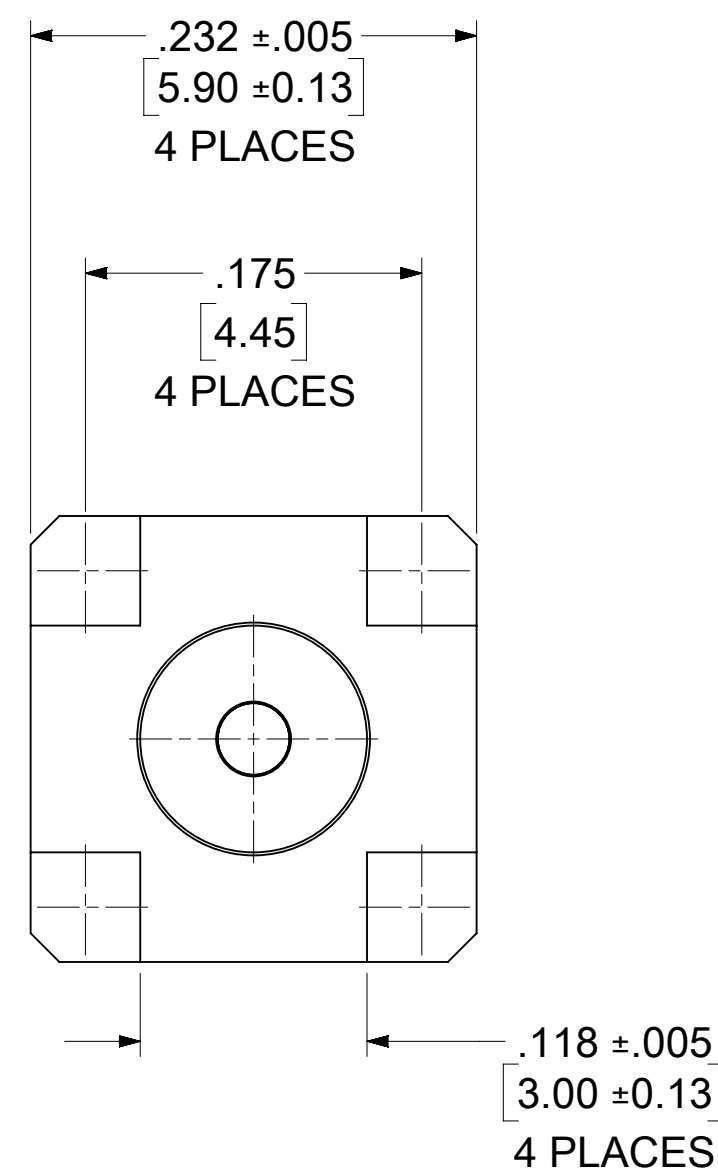

NOTE:
73415-1696 AND 73415-1697 WITH 4 SLOTS.
ALL OTHERS WITH 2 SLOT CONTACT.



73366-6510	73415-1691 WITH T&R SEE SHEET2 NOTE	GOLD (1 u")
73415-1699	ONE PIECE PER BAG	GOLD (1 u")
73415-1698	T&R SEE SHEET2 NOTE	GOLD (30 u")
73415-1697	73415-1696 WITH T&R SEE SHEET2 NOTE	GOLD (1 u")
73415-1696	GENERAL	GOLD (1 u")
73415-1695	73415-1690 WITH T&R SEE SHEET2 NOTE	NICKEL
73415-1694	73415-1691 PACKAGING SMALL TRAY	GOLD (1 u")
73415-1693	73415-1690 PACKAGING SMALL TRAY	NICKEL
73415-1692	73415-1691 WITH T&R SEE SHEET2 NOTE	GOLD (1 u")
73415-1691	BAG (500 PCS PER BAG)	GOLD (1 u")
73415-1690	BAG (500 PCS PER BAG)	NICKEL
PART NO.	PACKAGING	BODY PLATING

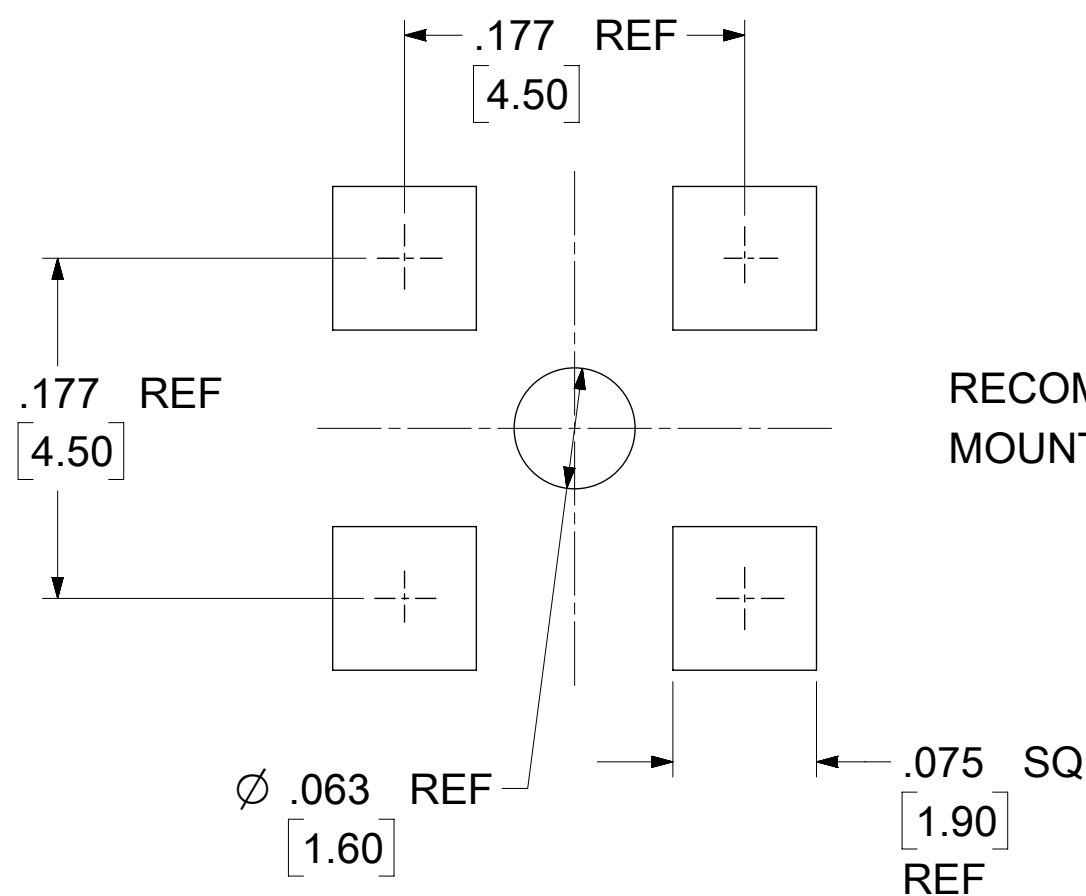


RECOMMENDED MOUNTING PATTERN

PS-89675-1830	PERFORMANCE
SPECIFICATION	DESCRIPTION

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIVISIONAL SYMBOLS	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED TOLERANCE PER EWR14541-A EC NO: 672469 DRWN: CWEI02 CHK'D: YCHENG APPR: YCHENG INITIAL REVISION: DRWN: LMB APPR: JWIENER		molex MCX PCB/SMT JACK 50 OHM MCX-J/PCB/SMT EWR-1148						
	IN/MM		NTS										
	GENERAL TOLERANCES (UNLESS SPECIFIED)												
	ANGULAR TOL ± 2.0 °		2021/06/07				PRODUCT CUSTOMER DRAWING						
	4 PLACES ±		2021/08/06										
3 PLACES ±		2021/08/06											
2 PLACES ± .01 / 0.25		2021/08/06		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION			
1 PLACE ±		2000/11/09		SD-73415-169		PSD		001		B6			
0 PLACES ±		2010/04/23											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
				C-SIZE		73415		SEE TABLE		GENERAL MARKET		1 OF 2	

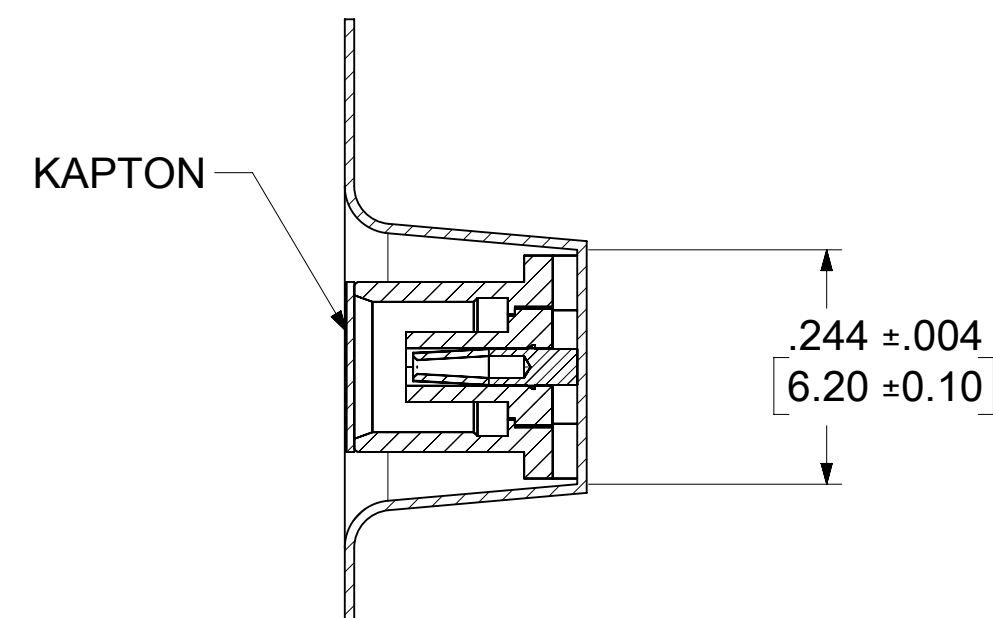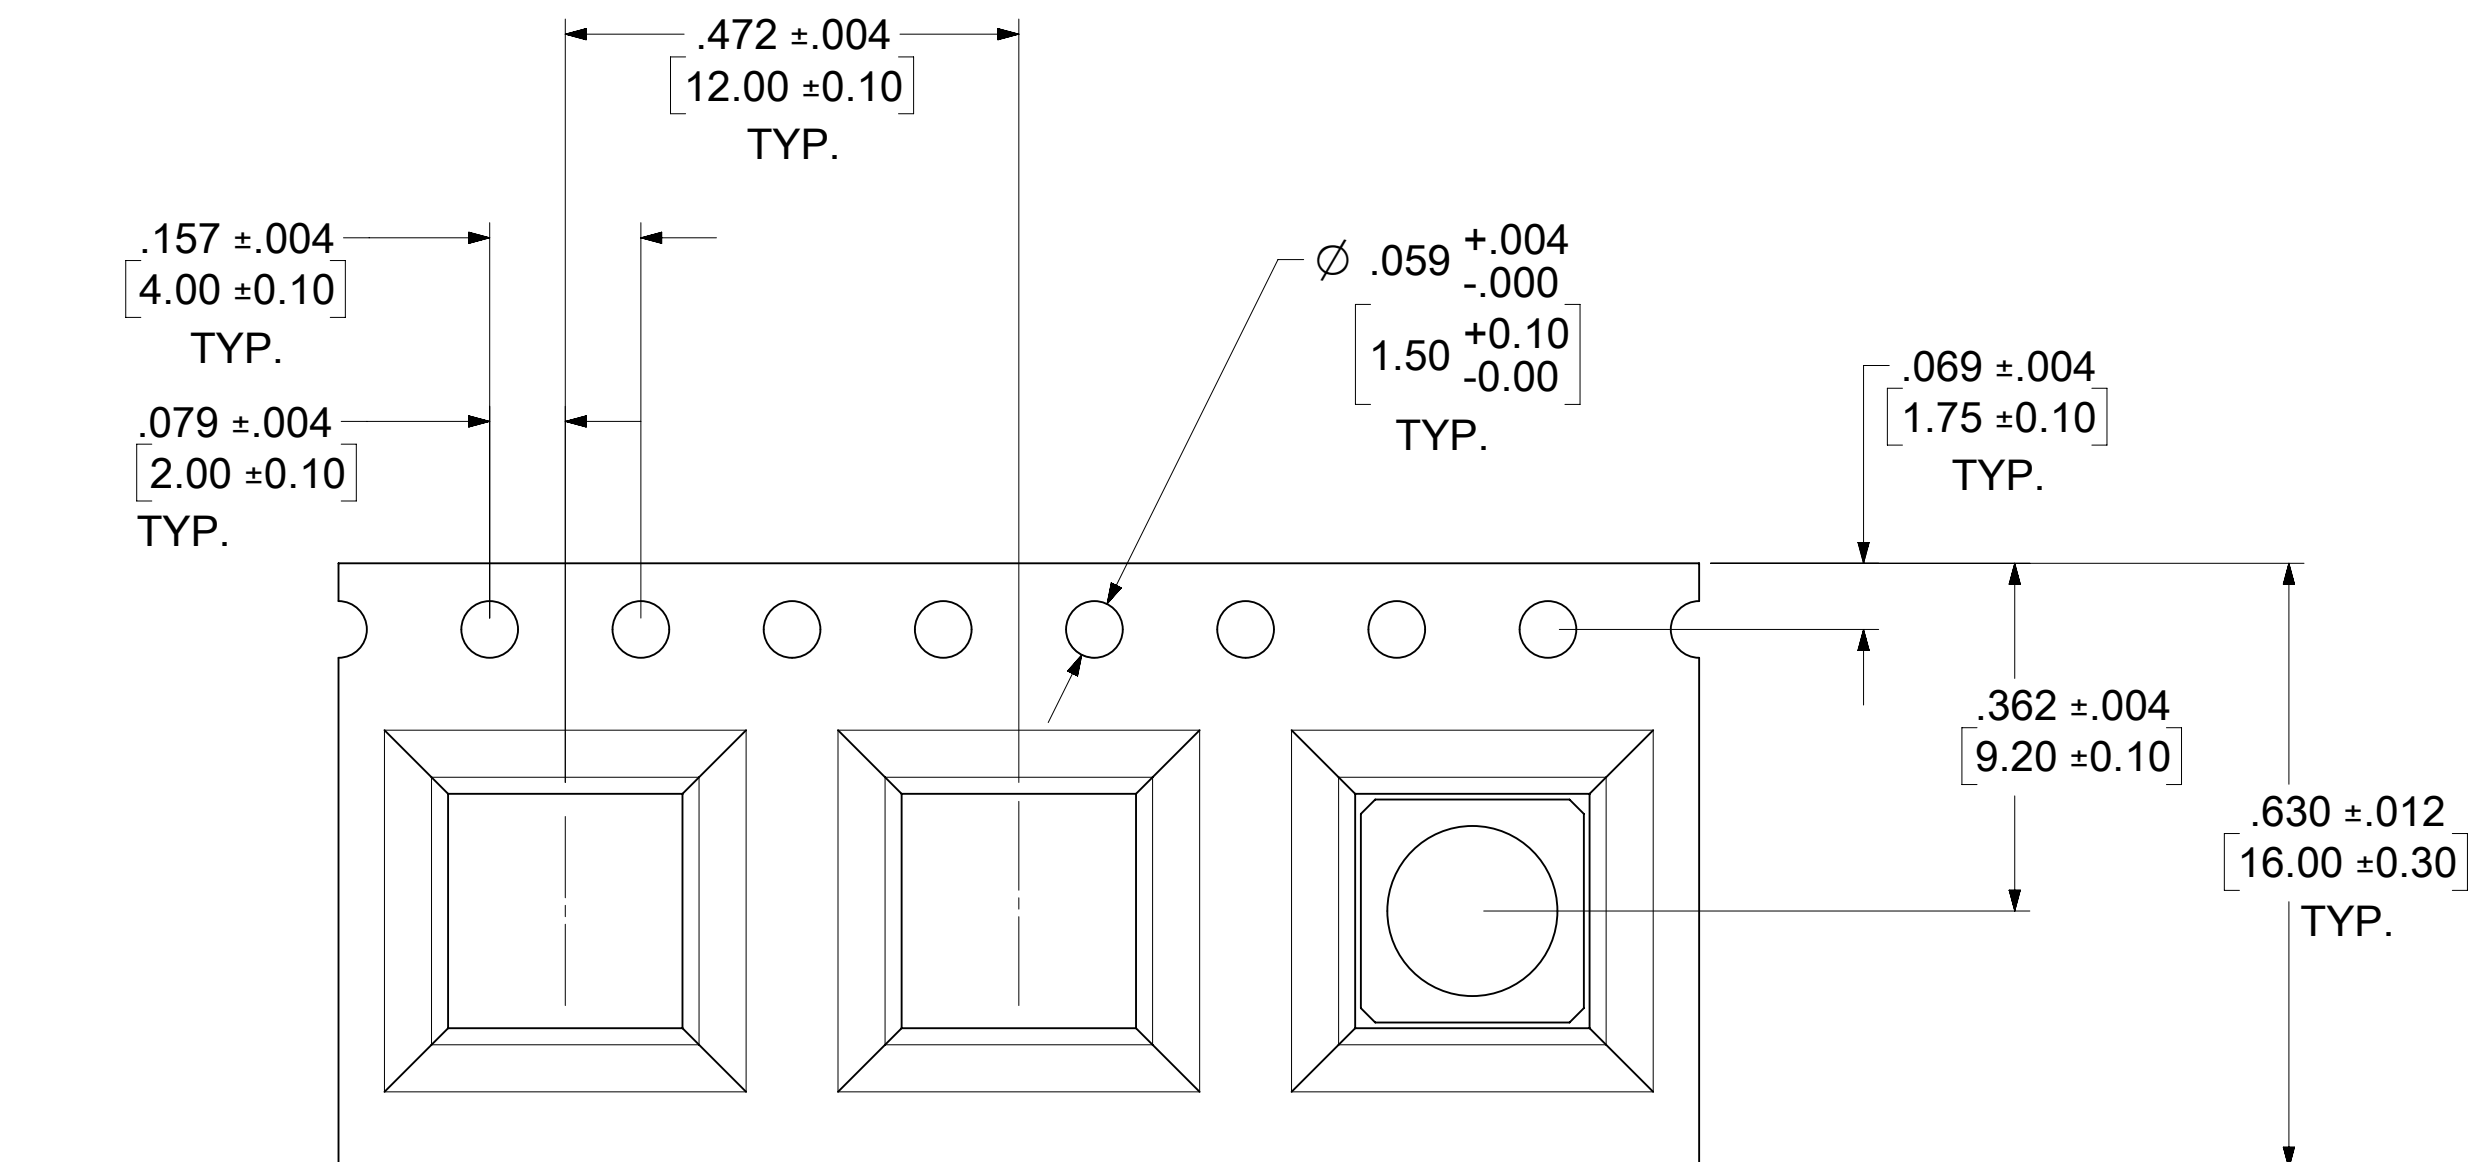

SECTION B-B

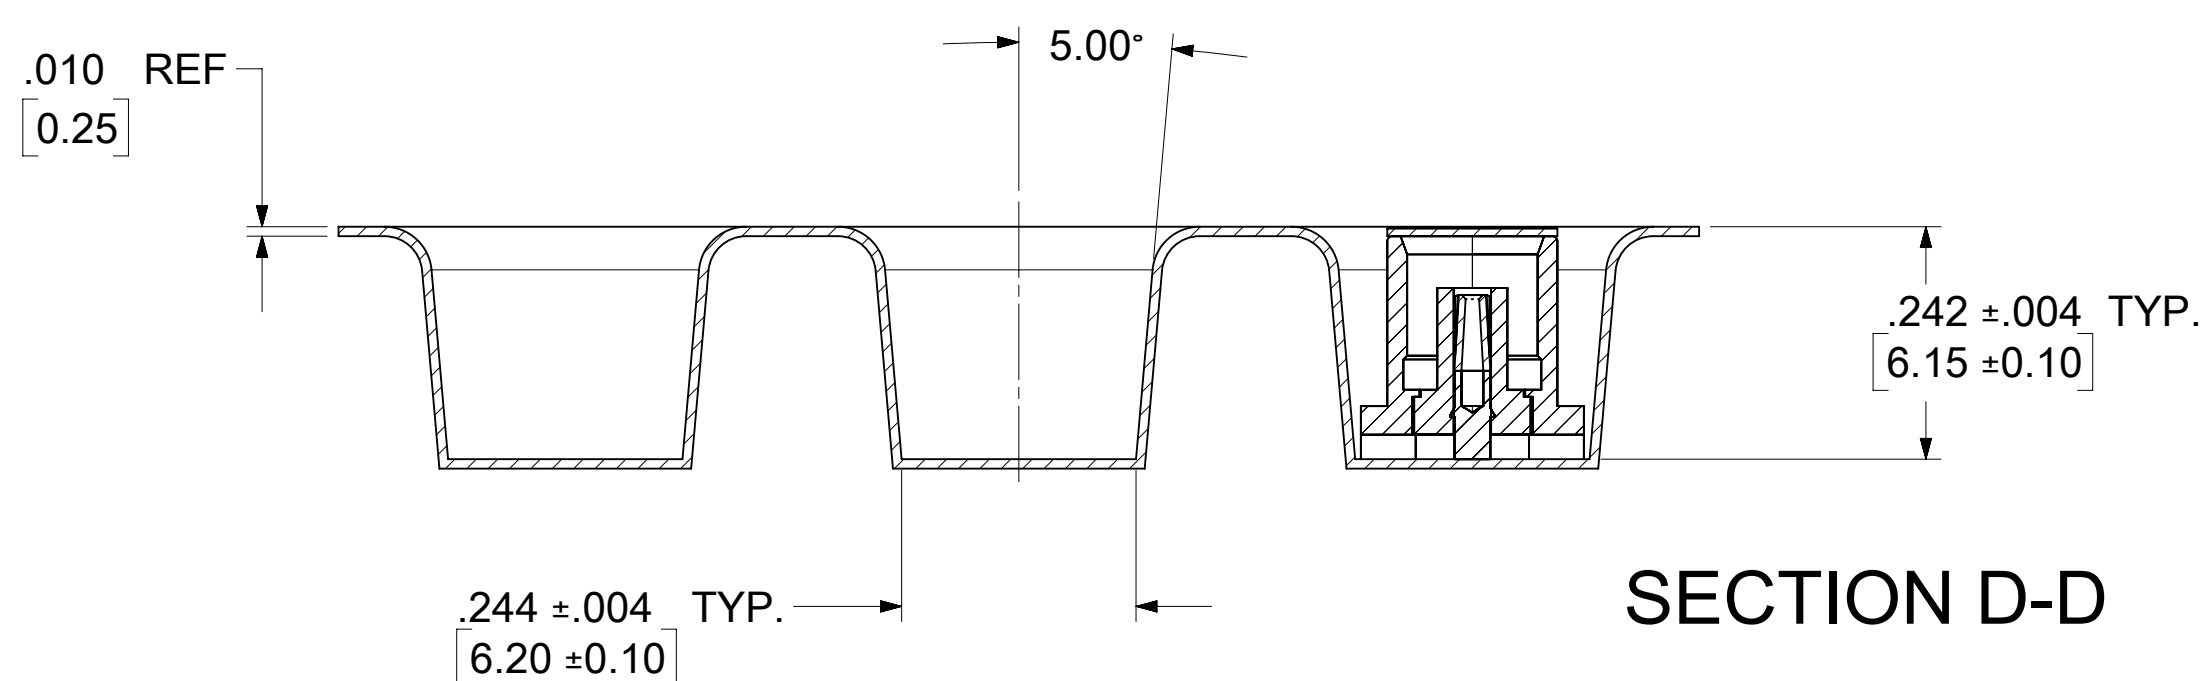

SECTION D-D

NOTE:
750 CONNECTOR PER REEL ON 13 INCH REEL,
16mm TAPE, 12mm CAVITY PITCH
TAPE CAP ON EACH PART

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
		DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED TOLERANCE PER EWR14541-A				molex					
IN/MM		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 672469 DRWN: CWEI02 CHK'D: YCHENG APPR: YCHENG								2021/06/07 2021/08/06 2021/08/06					
ANGULAR TOL ± 2.0 °															
		4 PLACES		±		INITIAL REVISION: DRWN: LMB APPR: JWIENER				2000/11/09 2010/04/23					
3 PLACES		±													
2 PLACES		± .01 / 0.25													
1 PLACE		±													
0 PLACES		±													
DIVISIONAL SYMBOLS		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						C-SIZE		73415		SEE TABLE		GENERAL MARKET		2 OF 2	

DOCUMENT STATUS	P1	RELEASE DATE	2021/08/06	08:46:55
-----------------	----	--------------	------------	----------